



Glendinning
QUARRY & CONCRETE PRODUCTS

built on solid principles



**PAVING
AND
WALLING**

E & JW Glendinning Limited is an independent family business and has been operating throughout the Westcountry for over 50 years. We are proud to support local businesses and the community and take pride in our Westcountry heritage.

The Glendinning Paving and Walling product range is manufactured using limestone aggregates from our quarry at Ashburton, Devon, together with other locally sourced reclaimed aggregates and is manufactured in Plymouth, Devon.

Our Plymouth manufacturing facility, as well as our other quarries and readymix concrete

batching plants, is managed in accordance with our Environmental Management System (EMS) that is externally audited and certificated by BSI Group to the international ISO 14001 accreditation.

The Paving and Walling range has evolved to suit the abundance of natural colours enjoyed in the Westcountry. Whether your inspiration is drawn from the moorland scenery or coastal landscapes, our Paving and Walling range has colours to bring your outdoor living areas to life.

Please take time to look through our Paving and Walling range: there are plenty of ideas to inspire your projects and enhance your lifestyle.

built on solid principles

CONTENTS

DECORATIVE PAVING

Barbican	4
Trinity and Rotunda	6
Ashmoor	8
Tuscany and Sorrento	9
Devontex	10
Rockriven	12
Linhay Patio Packs	14
Devonscape	16
Rivenscape	17
Edgings and Corners	18
Stepping and Tobishi Stones	20

WALLING

Natural Walling	21
Screen Blocks	22
Tumbled and Devonscape	23
Heystone and Torre	24

GUIDES

Paving Patterns	26
Guide to Paving Construction	30
Walling Patterns	32
Guide to Walling Construction	33

CILLS, COPINGS AND PIER CAPS

34

GENERAL PRODUCTS

35

Steps and Risers

Step Treads

Gully Surround

Bollards

Slither Tile

Bay Blocks

COUNTRY STYLE PRODUCTS 36

URBAN PAVING 38

KERBS 40

STANDARD AND TEXTURED PAVING 42

CONCRETE FENCE POSTS 43

TABLE TENNIS TABLE 44

CONCRETE BLOCKS 45

PRODUCT INFORMATION 46

CONTACT US Rear Cover



BARBICAN



Barbican Replica Flagstone Paving

Individually made to the highest standards, then subtly weathered to give an antique look to your patio or courtyard. The four sizes mean it can be laid in a random pattern to enhance the 'olde worlde' feel of the finished paving.

SPECIFICATIONS

Styles



Colours



Birchwood *Charcoal*

Sizes

	Pack Qty	Pack Weight	m ² per pack
600 x 600mm	25	0.76	9.00
600 x 300mm	50	0.77	9.00
450 x 450mm	50	0.85	10.13
300 x 300mm	50	0.38	4.50



Barbican Rotunda

With the Barbican Rotunda it's simple to create circular and semi-circular features, give patios and terraces a distinctive curved edge or use the squaring-off kit to complete a square. Made to order.


Rotunda

Available in Full or Half Circle in 35mm thickness.


2.7 metre diameter circle 620kgs

Squaring-off kit - 320kgs

Full or Half Circles available

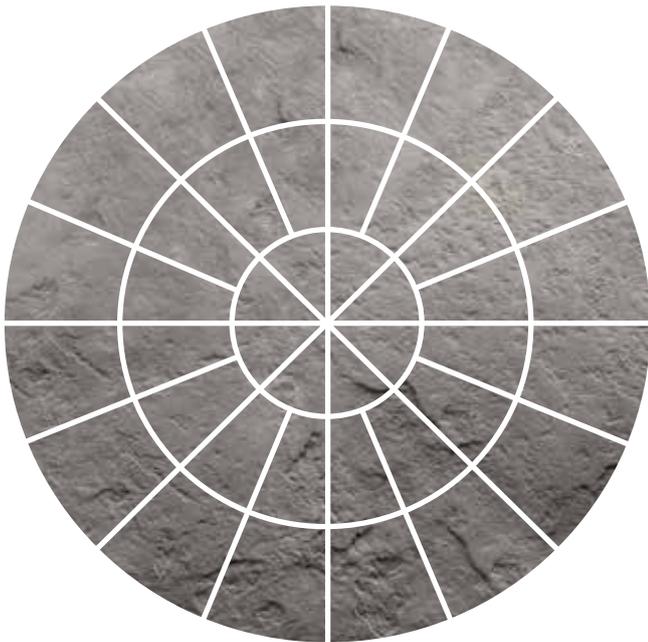

Rotunda makes a circle 2.7m dia. The width is increased to 3m with the squaring-off kit.

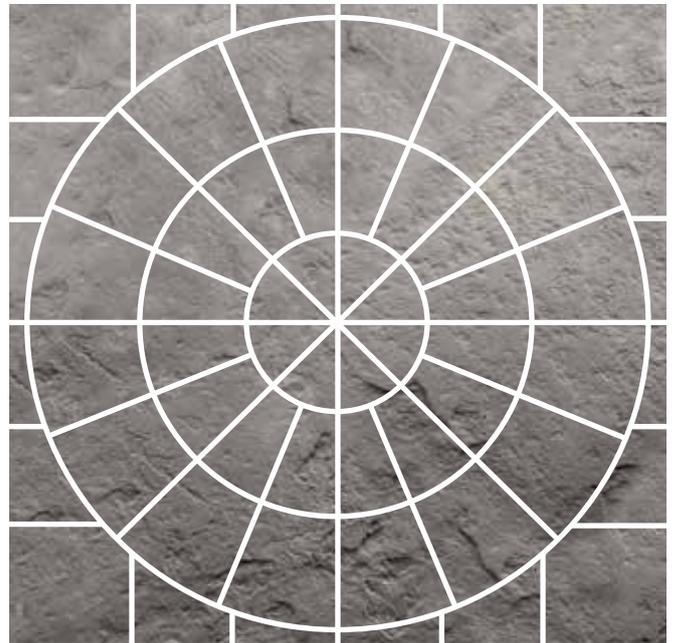

TRINITY & ROTUNDA



Trinity Paving

Trinity gives you the same effect as natural stone paving straight from the quarry and has a high-relief riven surface with uneven 'fettled' edges.

Millstone

Matches the Trinity and Rotunda ranges. It can either replace the centre section of a Rotunda circle, or be used upright as an attractive feature.

SPECIFICATIONS

Styles



Colour



Charcoal

Charcoal	Pack Qty	Pack Weight	m ² per pack
675 x 450mm	25	0.66	7.59
450 x 450mm	50	0.83	10.13
Patio Pack	1	0.62	7.3m ²

TRINITY CHARCOAL



Try our free online paving calculator at www.ejwglendinning.co.uk

Trinity & Ashmoor Rotunda

Segments, Rings, Quarter, Half and Full Circles available

Build steps, surrounds for ponds and trees and wandering pathways. You can create patios with curves, and paths with straight and curved sections. Use the squaring-off kit to turn the Rotunda circle into a square. Made to order.


Colours



Buff Charcoal Weathered York Rustic Taw



3600mm

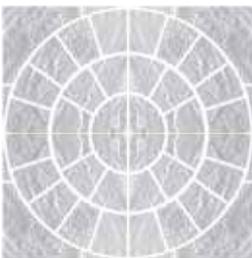

1800mm

Make 3.46m or 1.8m diameter circle. Adding a squaring-off kit will give a width of 3.6m or 1.8m.



ROTUNDA CHARCOAL WITH SQUARING-OFF KIT

Rotunda

	Charcoal	Buff	Weathered York	Rustic Taw
segment 5	450mm	450mm	450mm	450mm
segment 4	380mm	380mm	380mm	380mm
segment 3	300mm	300mm	300mm	300mm
segment 2	300mm	300mm	300mm	300mm
quadrant 1	600mm	600mm	600mm	600mm

All available in 35mm thickness. Millstone available in 100mm thickness.
3.5 metre - 925kgs, 1.8 metre - 550kgs.
Square-off kit large - 320kgs, Square-off kit small - 100kgs

ASHMOOR



WEATHERED YORK


Ashmoor Patio Pack

A rustic riven paver with fettled edges. The use of six different moulds and natural looking weathered shades gives Ashmoor the appearance of natural stone.

Ashmoor is supplied in a 5.76m² patio pack containing 8 600 x 600 & 16 600 x 300 pavers.

A rotunda (see page 7) along with a 450 x 450 riven paver is also available to compliment your landscaping ideas

Styles

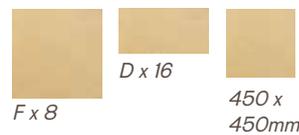



Colours



Sizes

Size	Pack Qty	Pack Weight	m ² per pack
Patio Pack	28	0.56	5.76
450 x 450mm	50	0.83	10.13

PATIO PACK LAYING PATTERN

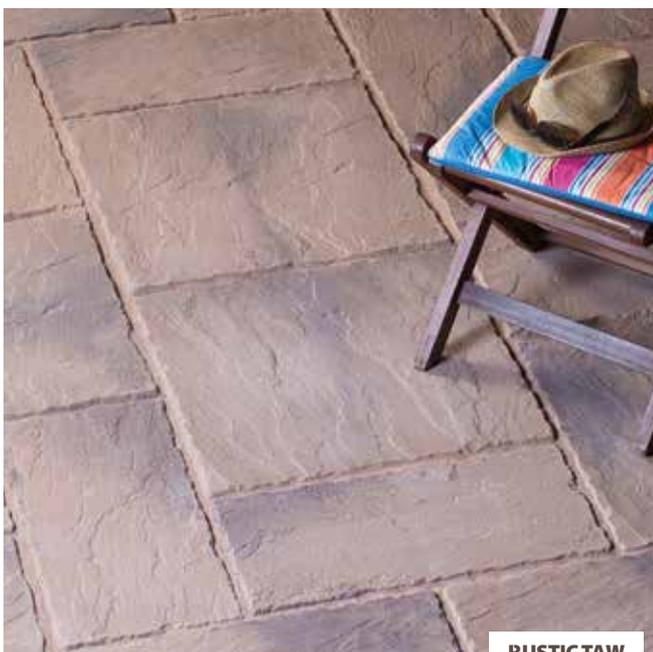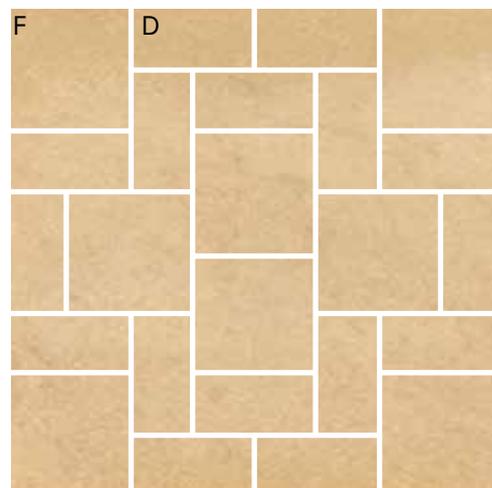

RUSTIC TAW

TUSCANY AND SORRENTO

The moulds for both ranges are made from genuine Italian tiles, and details like hand-made draw marks and worn surface areas are faithfully reproduced. They're ideal for giving that continental feeling indoors and out. The charcoal infill can be used with both Tuscany and Sorrento.

SPECIFICATIONS

Styles

Tuscany



Colours

Tuscany



Terracotta


Sorrento



Full

Half

Sorrento



Terracotta Charcoal

Sizes

Tuscany

Terracotta	Pack Qty	Pack Weight	m ² per pack
270 x 270mm	60	0.24	4.37
270 x 135mm	120	0.24	4.37

Available in 25mm thickness.

Sorrento

Terracotta	Pack Qty	Pack Weight	m ² per pack	
300 x 300mm	60	0.35	5.40	
Charcoal Infills	Pack Qty	Pack Weight	m ² per pack	
100 x 100mm	40	0.08	-	Full
100 x 100 x 140mm	80	0.08	-	Half

Available in 25mm thickness.

Infill and half Infill available in contrasting Charcoal.



TUSCANY



SORRENTO

DEVONTEX



DEVONTEX CHARCOAL

Devontex

Made of crushed stone, which is exposed on the surface. This makes them virtually non-slip, even when wet. Because they're pressed and not cast, they're extremely strong and hard-wearing. The four colours have been designed to blend with each other.

SPECIFICATIONS

Styles



Colours



Devontex 7.2m² Patio Pack

D 300 x 600 = 16
F 600 x 600 = 12


SPECIFICATIONS

Styles




*Patio Pack contains:
12 x 600 x 600mm
16 x 600 x 300mm
paving slabs*

Colours

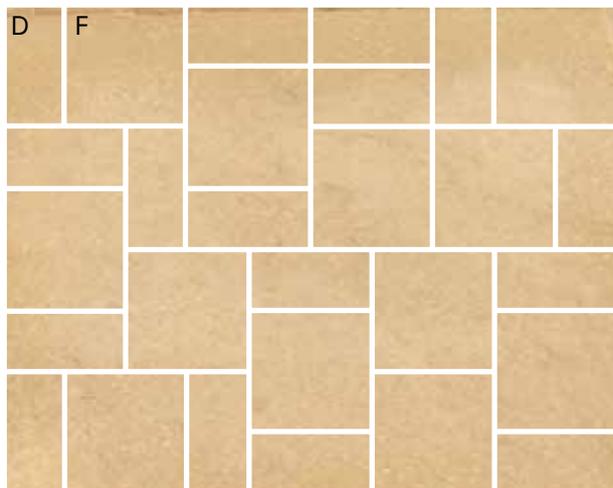

Devontex Patio Pack

Produced at our Plymouth works using locally sourced aggregates. Available in Natural, Buff and Charcoal. Devontex Patio Pack covers an area of 7.2m². See page 26 and 27 for patterns.

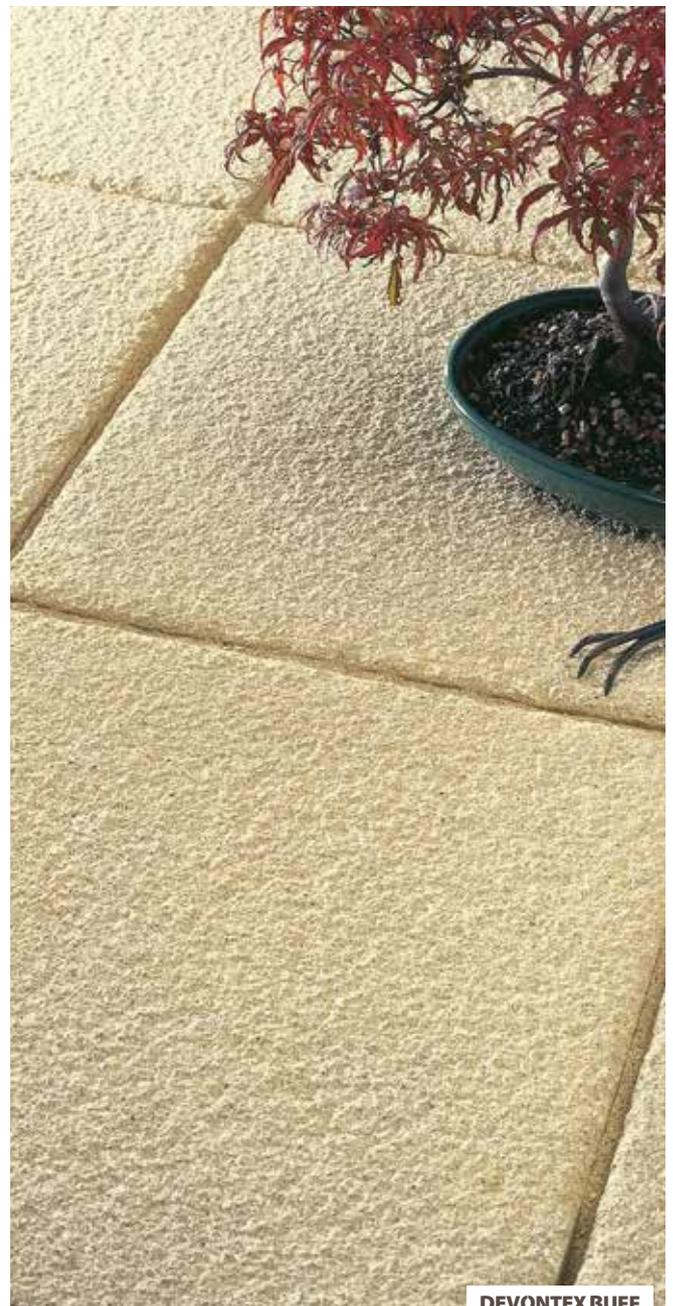

DEVONTEX BUFF

Sizes

Natural	Buff	Charcoal	Pink
450 x 450mm	450 x 450mm	450 x 450mm	450 x 450mm
600 x 600mm	600 x 600mm	600 x 600mm	600 x 600mm
600 x 300mm	600 x 300mm	600 x 300mm	
300 x 300mm	300 x 300mm	300 x 300mm	
Patio Pack 7.2m ²	Patio Pack 7.2m ²	Patio Pack 7.2m ²	*not available

Available in 35mm thickness, unless stated

Size	Pack Qty	Pack Weight	m ² per pack
450 x 450mm	50	0.93	10.13
600 x 600mm	25	0.83	9.00
600 x 600 x 50mm	20	0.87	7.20
600 x 300mm	25	0.42	4.50
300 x 300mm	50	0.42	4.50
Patio Pack	28	0.62	7.2

ROCKRIVEN




ROCKRIVEN BUFF

The low-relief riven stone finish gives the effect of an expensive natural stone - but Rockriven has the advantages of a relatively even surface for stable garden furniture, and straight edges for a modern image.

SPECIFICATIONS

Styles

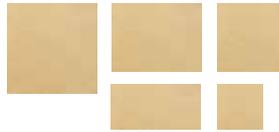



*Our most popular paving
for patios, terraces and paths*

SPECIFICATIONS

Colours



Natural



Buff



Charcoal



ROCKRIVEN CHARCOAL


Sizes

Size	Pack Qty	Pack Weight	m2 per pack
300 x 300mm	50	0.38	4.50
450 x 450mm	60	0.80	12.15
600 x 300mm	50	0.77	9.00
600 x 450mm	25	0.57	6.75
600 x 600mm	25	0.76	9.00

Natural	Buff	Charcoal
600 x 600mm	600 x 600mm	600 x 600mm
	600 x 450mm	600 x 450mm
600 x 300mm	600 x 300mm	600 x 300mm
450 x 450mm	450 x 450mm	450 x 450mm
300 x 300mm	300 x 300mm	300 x 300mm

Available in 32mm thickness, unless stated

LINHAY

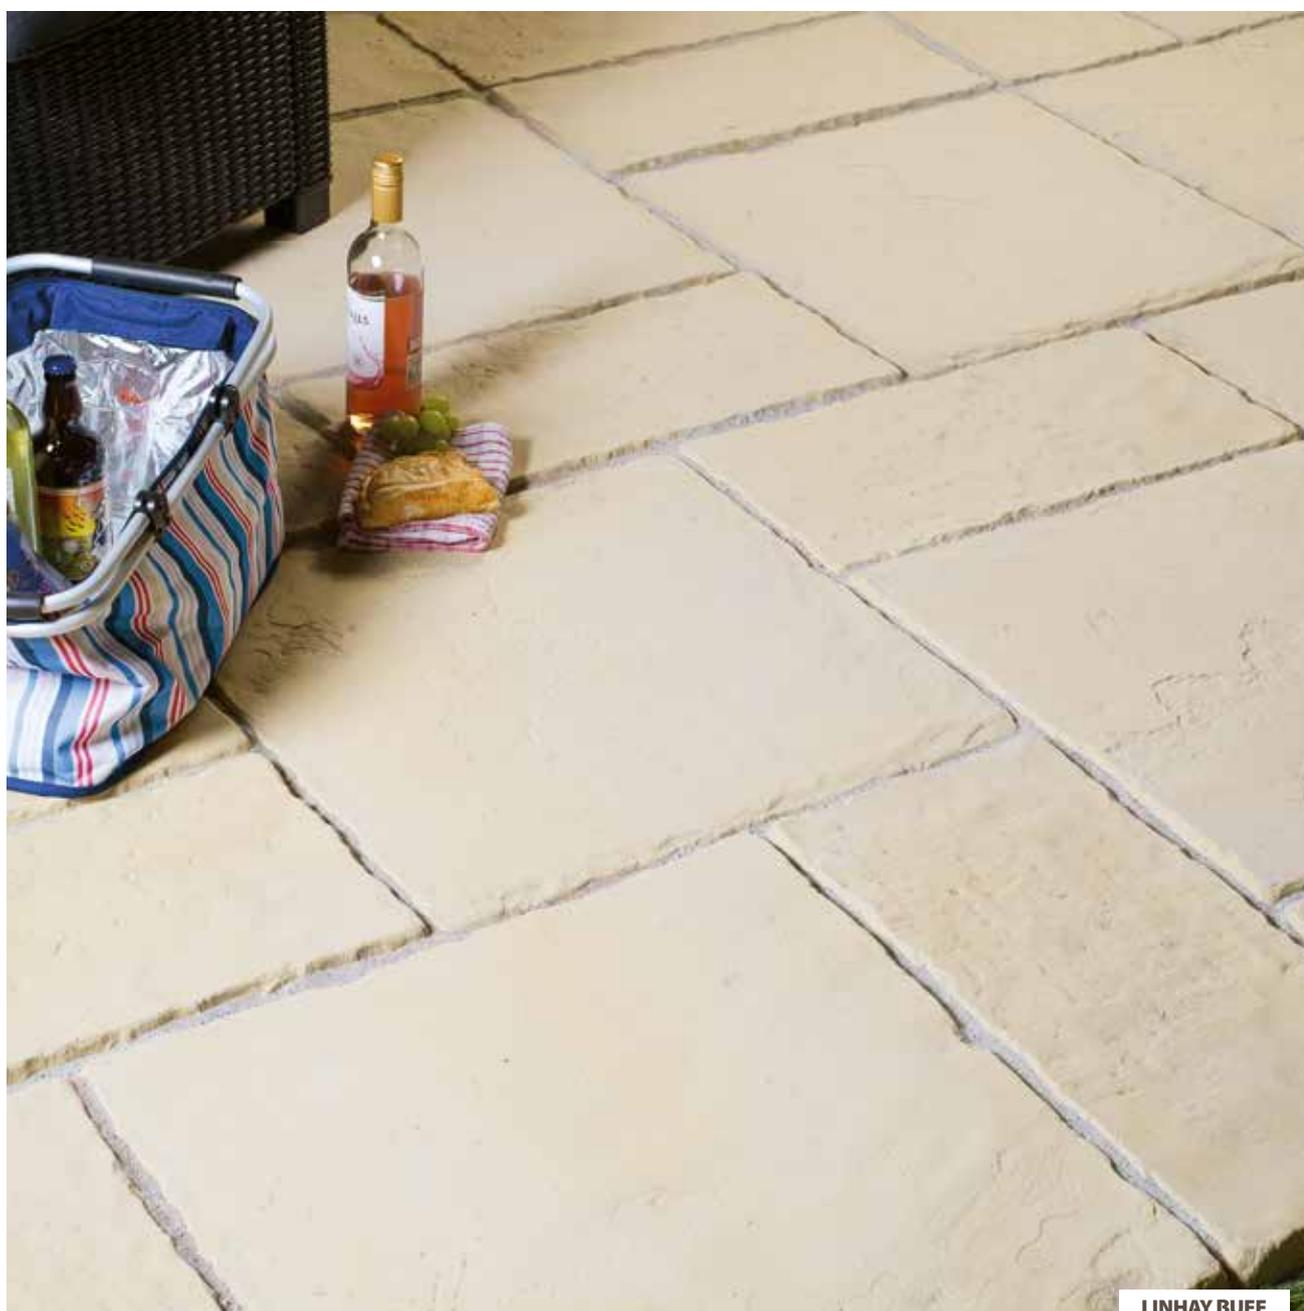

LINHAY BUFF



Try our free online paving calculator at www.ejwglendinning.co.uk


LINHAY BIRCHWOOD

Linhay 7.2m² Patio Packs

Modelled on the region's historic ports limestone flag paving and is manufactured with the Devonian limestone from Glendinning's quarry at Linhay Hill, Ashburton.

Replica flagstone paving like Linhay is designed to suit a time worn image on a budget.

Linhay Charcoal and Birchwood can be added to using the Barbican range.

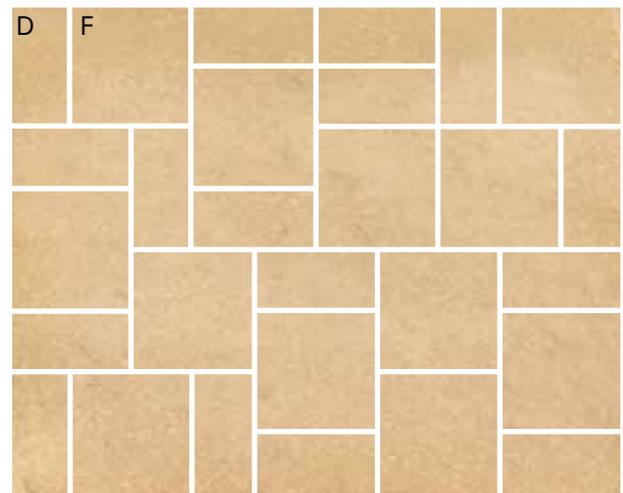


LINHAY CHARCOAL

Sizes

Pack Qty	Pack Weight	m ² per pack
28	0.62	7.2-7.44

PATIO PACK SPECIFICATIONS

Styles



Colours



DEVONSCAPE




DEVONSCAPE BUFF

The wide range of Devonscape paving makes it a popular choice for patios. Make simple, complex or random patterns out of the four colours and sizes. Though apparently a smooth surface, the fine gauze imprint gives some slip resistance. Some surface blemishes can occur because there is no secondary pressing, but will disappear with weathering.

SPECIFICATIONS

Styles



Colours



Sizes

	Size	Pack Qty	Pack Weight	m ² per pack
Natural	600 x 600mm	25	0.83	9.00
	600 x 300mm	25	0.42	4.50
	450 x 450mm	50	0.93	10.13
Buff	600 x 600mm	25	0.83	9.00
	450 x 450mm	50	0.93	10.13
Charcoal	600 x 600mm	25	0.83	9.00
	450 x 450mm	50	0.93	10.13
Pink	600 x 600mm	25	0.83	9.00
	450 x 450mm	50	0.93	10.13



DEVONSCAPE PINK

Available in 35mm thickness.

RIVENScape

Rivenscape

It may be **utility** paving, but its decorative 'riven' finish gives texture and character - especially on more extensive floor areas. Rivenscape is produced by the same method as Tamar and Devonscape - so it has a virtually non-slip surface, but can show initial surface blemishes which disappear with weathering.

SPECIFICATIONS

Styles



Colours



Natural



Buff



Pink



Charcoal

Sizes

	Size	Pack Qty	Pack Weight	m ² per pack
Natural	450 x 450mm	50	0.94	10.13
Buff	450 x 450mm	50	0.94	10.13
Pink	450 x 450mm	50	0.94	10.13
Charcoal	450 x 450mm	50	0.94	10.13

450 x 450mm available in 35mm thickness.



RIVENScape BUFF



RIVENScape NATURAL

EDGING AND CORNERS



Rope Top Terracotta



Rope Top Buff



Rope Top Charcoal



Round Top Natural

Apart from preventing garden or grass from encroaching onto your paved areas, this range of decorative and textured edgings and corner units gives extra aesthetic appeal to your project.

SPECIFICATIONS

Half Rope Top

Available in Buff, Charcoal and Terracotta.

Approx 900 x 150 x 50mm

Pack Qty: 96

Pack Weight: 1.48

Plain Round Top

Available in Natural.

Approx 900 x 150 x 50mm

Pack Qty: 80

Pack Weight: 1.23

Approx 900 x 200 x 50mm

Pack Qty: 60

Pack Weight: 1.16




Textured Flat Top Natural



Textured Flat Top Buff



Textured Flat Top Pink



Textured Flat Top Charcoal

Textured Flat Top

Available in Natural, Buff, Charcoal and Pink.

Approx 900 x 150 x 50mm

Pack Qty: 80

Pack Weight: 1.23



Saw Tooth Charcoal

Saw Tooth

Available in Charcoal.

Approx 630 x 130 x 110mm

Pack Qty: 48. Pack Weight: 0.75



*A great finishing touch
to define any garden*

Victorian*


Available in Charcoal and Terracotta.

450 x 50mm

Pack Qty: 40

Pack Weight: 0.54.

**Made to order*

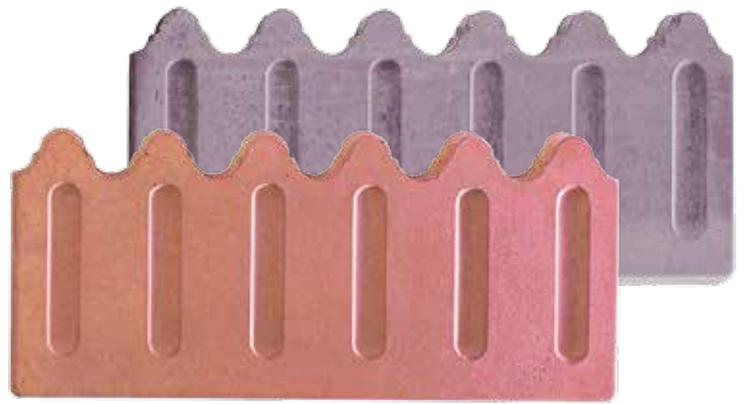

Sleepers

885 x 215 x 44mm

665 x 215 x 44mm



Corners

Rope Top Corners

Available in Buff, Charcoal and Terracotta.

285 x 50 x 50mm. Pack Qty: 8.


Ball Finials*

Available in Natural. 227mm and 330mm diameter.

**Made to order*



ROPE TOP CORNERS

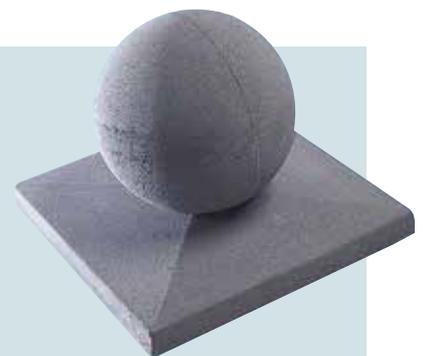

BALL FINIALS

STEPPING & TOBISHI STONES



TOBISHI CHARCOAL



450 BUFF

Inspired by traditional Japanese design, Tobishi Stones laid in gravel create a contemporary theme on the ever growing popular trend for Japanese garden design.

They work equally well through lawns in traditional country garden settings.

TOBISHI SPECIFICATIONS

Colours



Terracotta



Buff



Charcoal



Sizes

	Pack Qty	Pack Weight
5 random shapes	20	0.38

STEPPING STONES SPECIFICATIONS

The 450mm & 300mm stepping stones are available in both Charcoal & Buff. Cut Log available in russet bronze only.

Styles



300mm



450mm



Log

Colours



Buff



Charcoal

Sizes

	Pack Qty	Pack Weight
300mm	50	0.38
450mm	25	0.43

NATURAL WALLING

Linhay Selected Walling Stone*

Devonian Blue/Grey Limestone quarried at the southern end of the Dartmoor National Park.




Pigsdon Selected Walling Stone*

Pigsdon is a Gritstone quarried in North East Cornwall.
Available in 2 approximate sizes;
100-150mm building stone
150-225mm building stone



*As with all natural products colour will vary depending on what part of the quarry is being worked. Supplied in bulk tipped loads.

SCREEN BLOCKS

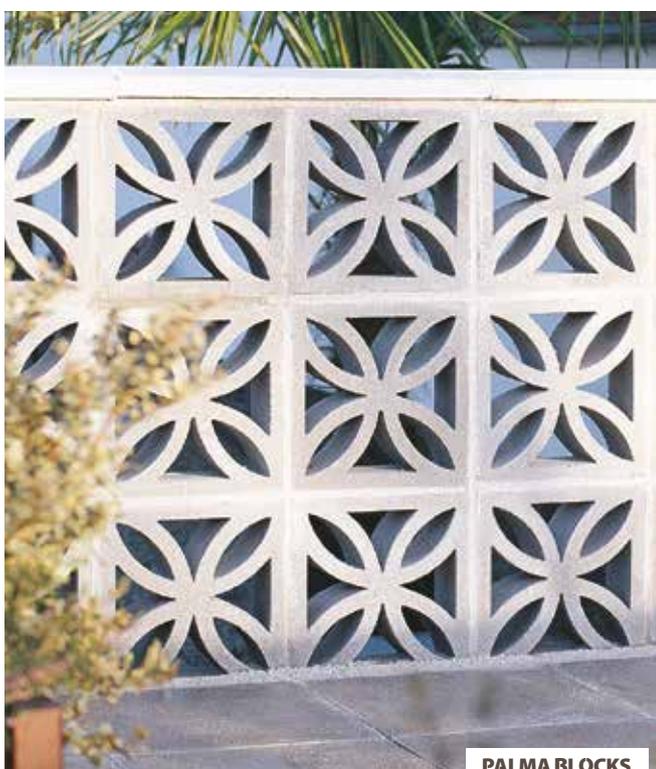

The classic way to create privacy in your outdoor living area, or to build balustrade walling around terraces or patios. They're permanent, maintenance free, and need no painting.

Pier Blocks, Caps and Copings

For stability, screen walls need support at a maximum of every 3 metres with these specially-designed pier units. Choose from Apex or Flat Topped Caps and Copings to suit the style of your wall.

SPECIFICATIONS

Styles



Palma

Genoa

Screen Blocks

Approximately 300 x 300 x 100mm.
Pack Qty: 108. Pack weight: 1.08

Pier Blocks

Approximately 185 x 185 x 200mm.
Produced in the form of ends and intermediates only.
Pack Qty: 64. Pack weight: 0.67

Copings

Available in Apex and Flat Top.
Approximately 600 x 140 x 38mm.
Pack Qty: 80. Pack weight: 0.51


Pier Caps

Available in Apex and Flat Top.
Approximately 215 x 215mm.

Colours



Natural

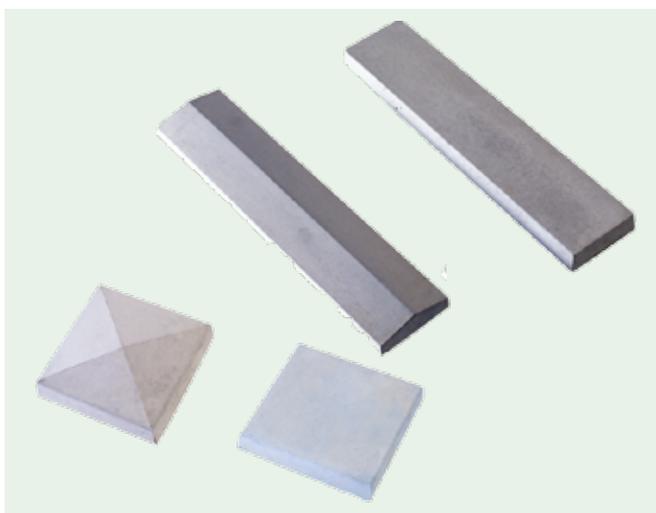

TUMBLLED AND DEVONSCAPE

Tumbled Walling

Tumbled walling is based on our Devonscape Walling range but processed to give an aged appearance to any newly built wall.

Devonscape Walling


Devonscape is a versatile walling block that can be used anywhere from step risers to low walls, retaining walls to housing. It has the appearance and texture of natural stone, yet its uniform dimensions make it much easier to work with. Wallstone heights of 65mm and 140mm are designed to be used with joints of 10mm to give course heights of 75mm and 150mm. The 300mm length is designed to give a with-joint module of 310mm.

SPECIFICATIONS

Styles



Colours

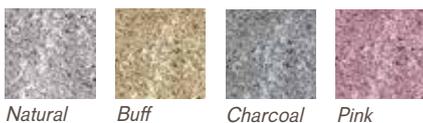

Natural

Buff

Charcoal

Pink

Sizes

	Size	Pack Qty	Pack Weight
Natural	300 x 100 x 140mm	162	1.64
	300 x 100 x 65mm	324	1.52
	150 x 100 x 140mm	324	1.64
	150 x 100 x 65mm	648	1.52
Buff	300 x 100 x 140mm	162	1.64
	300 x 100 x 65mm	324	1.52
	150 x 100 x 140mm	324	1.64
	150 x 100 x 65mm	648	1.52
Charcoal	300 x 100 x 140mm	162	1.64
	300 x 100 x 65mm	324	1.52
	150 x 100 x 140mm	324	1.64
	150 x 100 x 65mm	648	1.52
Pink	300 x 100 x 140mm	162	1.64
	300 x 100 x 65mm	324	1.52
	150 x 100 x 140mm	324	1.64
	150 x 100 x 65mm	648	1.52

Devonscape walling supplied on pallets, Tumbled walling supplied in bulk bags.



HEYSTONE AND TORRE



HEYSTONE BUFF

Heystone Weathered York

A light and dark weathered combination to compliment your garden.

Heystone Walling


It looks like Cotswold Stone or Granite, yet it's manufactured in regular blocks patterned by false joints.

SPECIFICATIONS

Styles



Colours



Granite

Buff



Weathered York

Sizes

	Size		Pack Qty	Pack Weight
Granite	Full Block	440 x 100 x 150mm	70	1.06
	Half Block	220 x 100 x 150mm	140	1.06
	Textured Coping	914 x 150 x 50mm	80	1.23
Buff	Full Block	440 x 100 x 150mm	70	1.06
	Half Block	220 x 100 x 150mm	140	1.06
	Plain Coping	530 x 150 x 50mm	80	0.80
	Textured Coping	914 x 150 x 50mm	80	1.23
Weathered York	Full Block	440 x 100 x 150mm	70	1.06
	Half Block	220 x 100 x 150mm	140	1.06
	Weathered Coping	530 x 150 x 50mm	80	0.80



HEYSTONE WEATHERED YORK



Torre

As it's manufactured in regular blocks patterned by false joints, you very soon build up the effect of natural stone walling, without learning traditional stonework skills.

SPECIFICATIONS

Styles



Colours



Sizes

	Pack Qty	Pack Weight
Full Block 450 x 120 x 112mm	84	0.97
Half Block 225 x 120 x 112mm	168	0.97
Coping 450 x 160 x 130mm	80	0.92

Full blocks available as intermediate block or with finished ends. Half blocks finished ends only.




BIRCHWOOD



WEATHERED YORK


PAVING PATTERNS

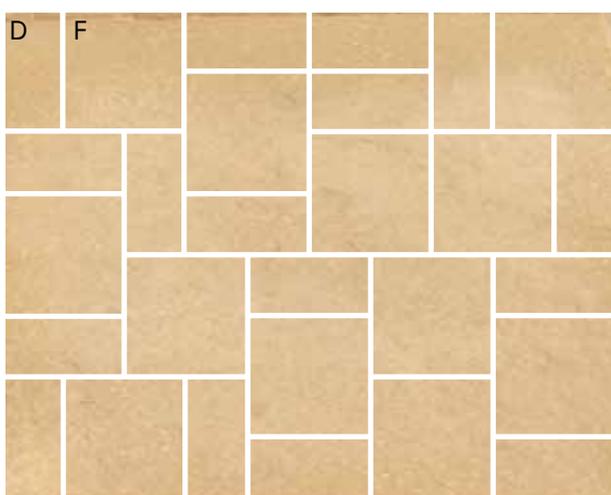

Linhay / Devontex 3 x 2.4m 7.2m² Patio Pack Example 1

D 300 x 600 = 16

F 600 x 600 = 12

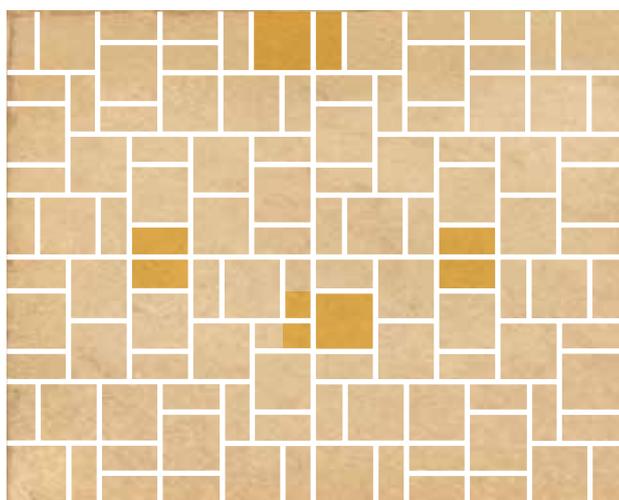


Joining Packs

 Rotate to suit

*There are many ways to lay your chosen paving to make your patio even more pleasing to the eye.
These designs are approximate, allow 10-15mm between the paving for pointing.*


Linhay / Devontex 3 x 2.4m
7.2m² Patio Pack Example 2

D 300 x 600 = 16
F 600 x 600 = 12

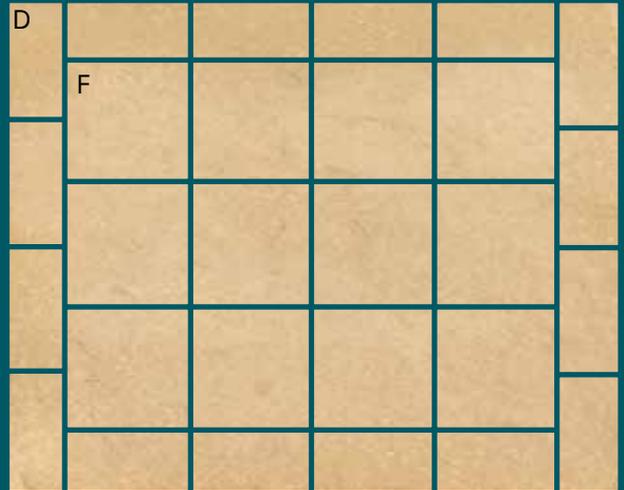


Ashmoor 2.4 x 2.4m
5.76m² Patio Pack

D 300 x 600 = 16
F 600 x 600 = 8

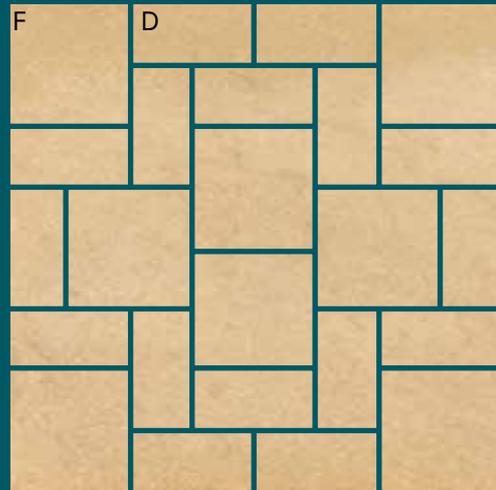


Trinity Bond - 7.29m² 2.7 x 2.7m

C 450 x 450 = 18
H 450 x 675 = 12

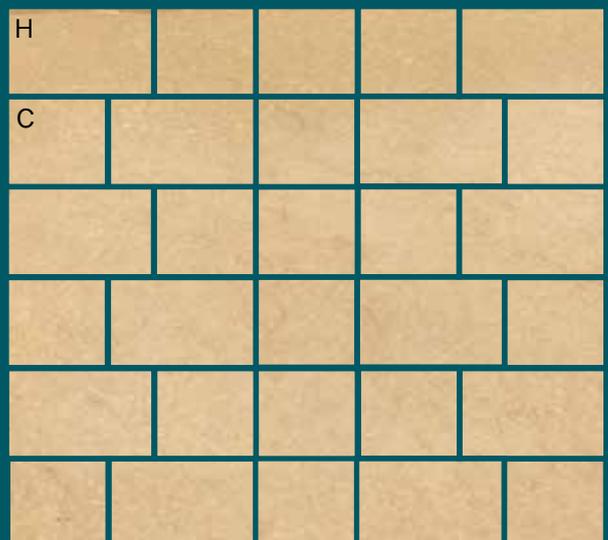

PAVING PATTERNS

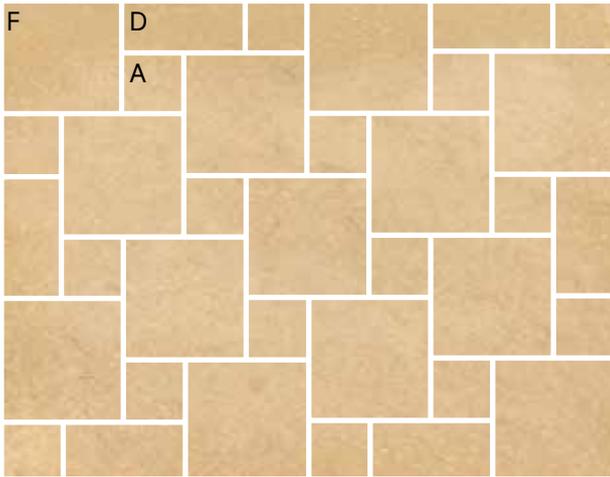


Dutch - 7.2m² 3 x 2.4m

Suitable for Barbican, Rockriven and Devontex.

D 300 x 600 = 6

F 600 x 600 = 13

A 300 x 300 = 16

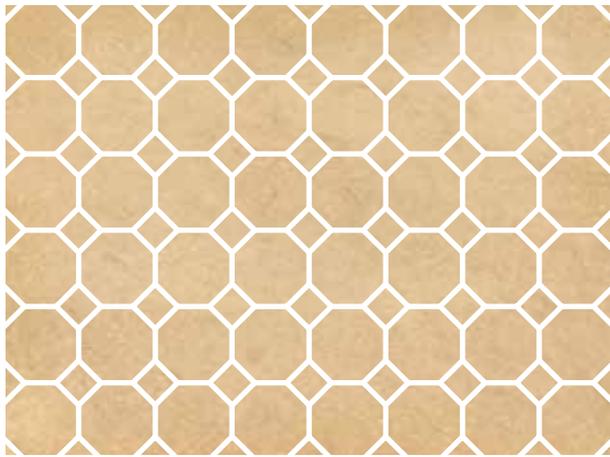


Sorrento 4.32m² (1.8 x 2.4m)

Sorrento 300 x 300 = 48

Full Infills = 35

Half Infills = 28

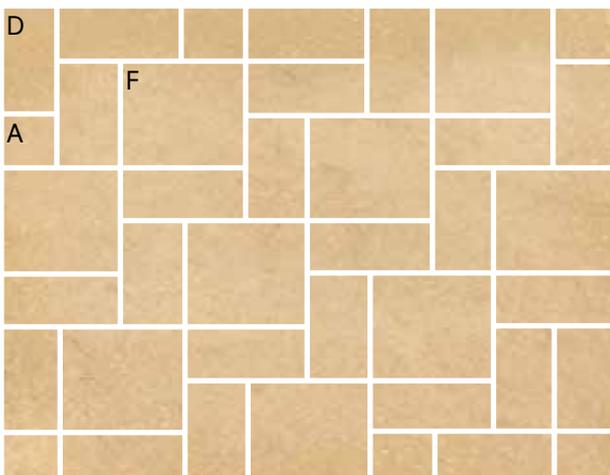

Wessex - 8.1m² 3 x 2.7m

Suitable for Barbican, Rockriven and Devontex.

A 300 x 300 = 6

D 300 x 600 = 24

F 600 x 600 = 9

These designs are approximate, allow 10-15mm between the paving for pointing.

Size


300 x 300mm	$1\text{m}^2/0.09 = 11.11$ per m^2
450 x 450mm	$1\text{m}^2/0.2025 = 4.94$ per m^2
600 x 450mm	$1\text{m}^2/0.27 = 3.7$ per m^2
675 x 450mm	$1\text{m}^2/0.3038 = 3.29$ per m^2
600 x 600mm	$1\text{m}^2/0.36 = 2.778$ per m^2

Try our free online paving calculator at
www.ejwglendinning.co.uk

Random 4 - 7.2m² 3 x 2.4m

Suitable for Barbican, Rockriven and Devontex.


A	300 x 300 = 12
C	450 x 450 = 12
D	300 x 600 = 9
F	600 x 600 = 6

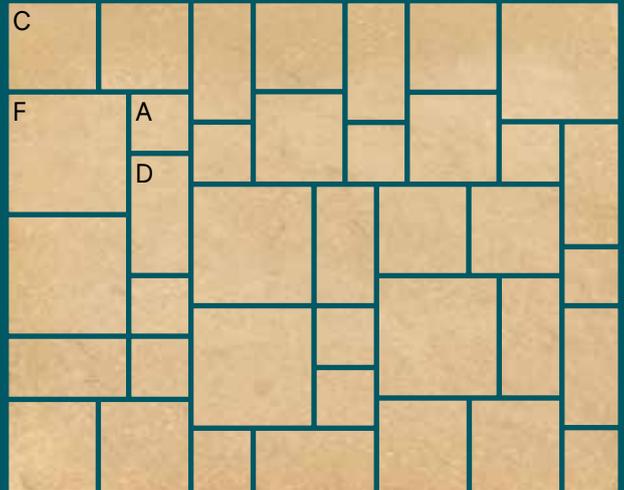

Random 5 - 7.2m² 3 x 2.4m


Suitable for Rockriven.

A	300 x 300 = 13
C	450 x 450 = 4
D	300 x 600 = 11
E	450 x 600 = 8
F	600 x 600 = 3

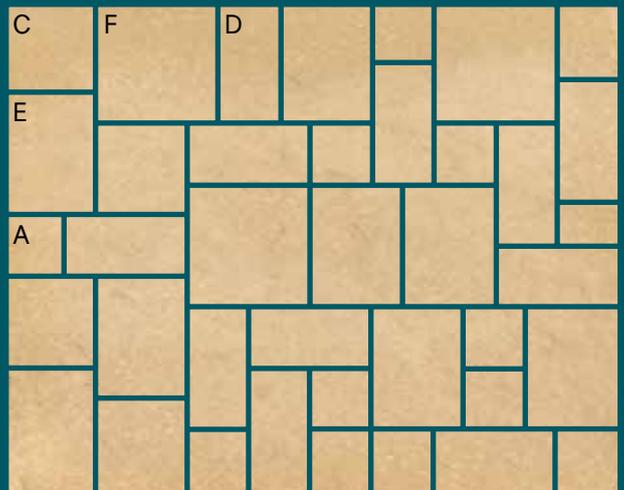


Brick Bond - C 7.29/F 12.96m²

C 2.7 x 2.7m	450 x 450 7.29m ² = 36
F 3.6 x 3.6m	600 x 600 12.96m ² = 36

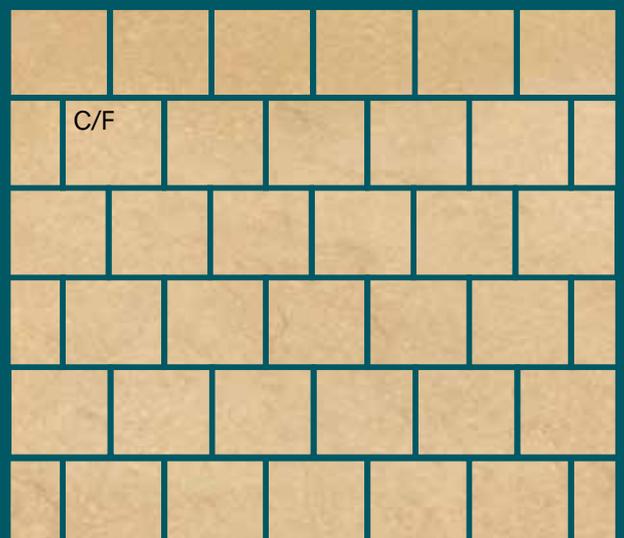


These designs are approximate, allow 10-15mm between the paving for pointing.

GUIDE TO PAVING CONSTRUCTION

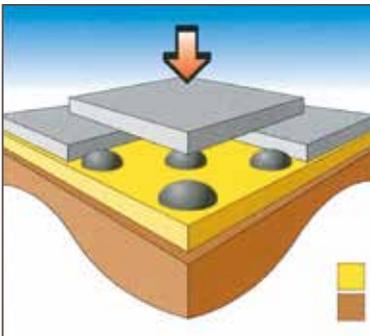

Light Garden Use

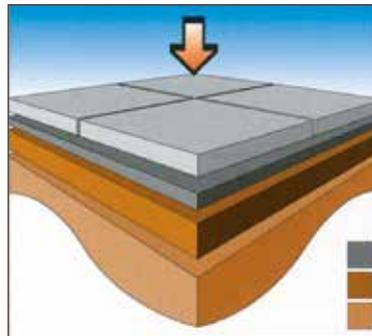

Driveways




Preparation is key

Spend time in planning the design and materials required. The more in-depth the planning the better the result. Take note of new planning regulations for front gardens/driveways and consider appropriate drainage where required.

The finished level of the patio should be at least two full bricks below the damp proof course with a fall of 1:4 away from the building.

Paving can be laid on a bed of sharp sand on top of well compacted soil or sub base, but a concrete (ballast 6:1 cement) or screed (sand 4:1 cement) base would provide a more stable foundation for the patio with the depth depending on what traffic the pavers will be taking and ground conditions.

Always dry-lay the pavers first to check desired pattern and adjust as necessary to reduce cuts. If more than one pack is being used the pavers should be randomly selected from different packs to blend colour variations.

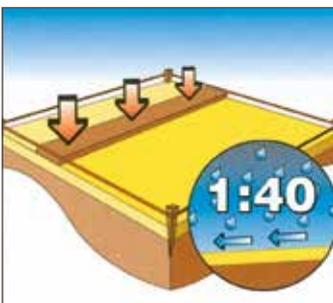

1 Use a string line to mark out the patio edges if required.

Allow 10-15mm for joint widths. Cut short lengths of appropriate thickness timber to act as spacers if required.



2 Mix Sand and Cement mortar in a ratio of at least 4:1.

If using the 5 spot method ensure the mortar spots are large enough to meet, this will reduce the chance of the paving rocking. Alternatively lay the pavers on a solid mortar bed (recommended).



3 Start laying the pavers from one corner.

4 Check frequently with a straight edge and spirit level to ensure correct fall and pavers are level.

5 Use a rubber or wooden mallet to tap down the pavers if required. Care should be taken not to tap the pavers close to the edge.

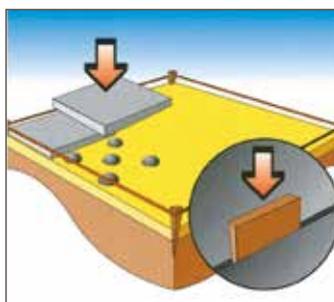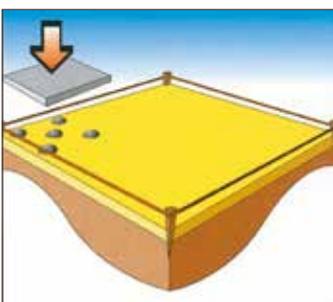


- 6 Allow time for the paving to set prior to pointing.
- 7 Use a 3:1 mortar mix and pointing trowel to fill the joints. Squeeze a handful of mortar in a gloved hand, if the mortar holds together then the mix should be at the right consistency. Too wet could cause staining, too dry and the mortar will not hold in the joints.
- 8 To help maintain the patio consider applying a proprietary sealer. Test before applying.

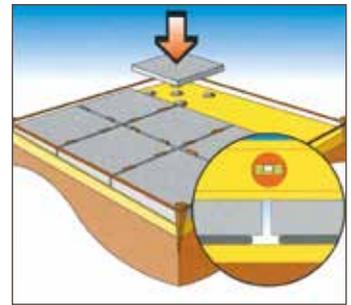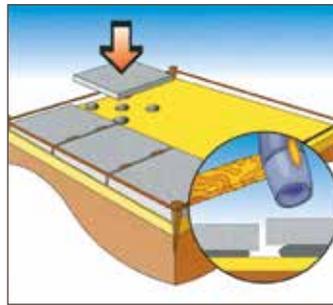

Laying a circle

- 1 Prepare the site in the same way as paving.
- 2 Dry-lay the circle and mark outline with sand or chalk.
- 3 Prepare the foundation.
- 4 Mark the centre with a pin and start to lay the inner ring or millstone.
- 5 Complete each ring in turn.
- 6 If the circle is being laid as a feature, finish the circle off with a Squaring-Off Paver before proceeding with the rest of the patio.
- 7 Point the joints once complete.

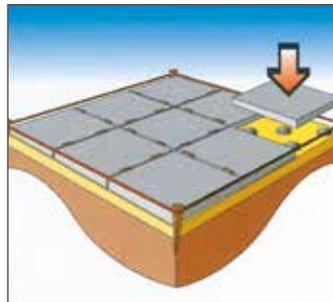

Instructions are a guide only

Examples of permeable material available from Glendinning

- **Open Graded Bitumen Macadam** - A no fines Macadam that consists of mainly larger size aggregates, which are held together with a bituminous binder producing a honeycomb effect, which enables water to pass through the voids. Traditionally used for Tennis courts to reduce puddling of water to allow play during or shortly after rain. Open graded binder and surface courses available.
- **No Fines Concrete** - Same principle as open graded macadam above, but the single size aggregate is bonded together with cement. No fines concrete reduces the chances of the aggregates shifting which would reduce the size and amount of voids within the concrete as water permeates through reducing its effectiveness.
- **Drainage Aggregates** - Selected blends or single size aggregates that can be used as a soak-a-way, land or highway drainage.
- **Graded Sub Base** - Type 3 open graded SHW 805 is produced for use beneath other permeable solutions as a replacement for 803 that has been traditionally used as a sub base for non-permeable products.

Drop Kerbs for New Access

If making a new access for a driveway that crosses a footpath, permission will need to be obtained from your local council, as the pavement could need to be reinforced to protect the underground services such as gas and water.

Paving your Front Gardens and Drives

Important information on sustainable landscaping

From 1st of October 2008 new rules came into force for householders wanting to pave their front gardens and there may be a requirement to obtain planning permission.


The new rules arose because of an increasing number of homeowners and developers converting front gardens from gravel or grass to hard landscaping causing greater volume of water run off within the mains drainage, increasing the likelihood of localised flooding.

Planning permission may not be needed if a new driveway or front garden is constructed with permeable (or porous) surfacing, allowing the rainwater to filter through to the ground beneath or if the water is directed to lawn or border. Permission will need to be sought if the area is greater than 5m² and being constructed with an impermeable surface.

The above information is a guide only; please contact your local planning department for advice.

For more information about planning and permeable solutions visit www.planningportal.gov


WALLING PATTERNS

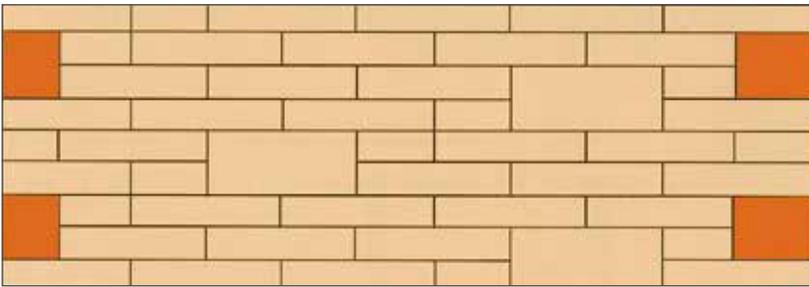

County

Blocks required per square metre


8.60	@	150 x 65mm
30.10	@	300 x 65mm
4.30	@	300 x 140mm

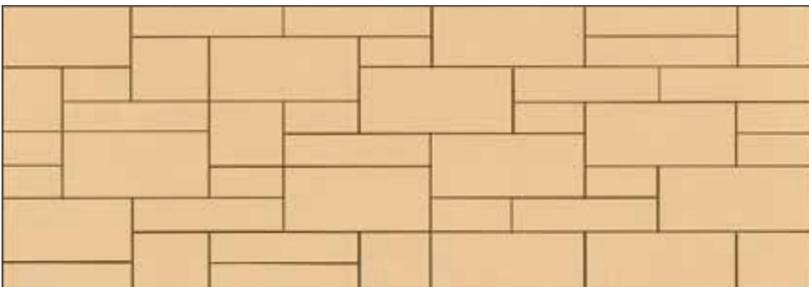

Random

Blocks required per square metre


9.86	@	150 x 65mm
11.65	@	300 x 65mm
4.04	@	150 x 140mm
11.20	@	300 x 140mm

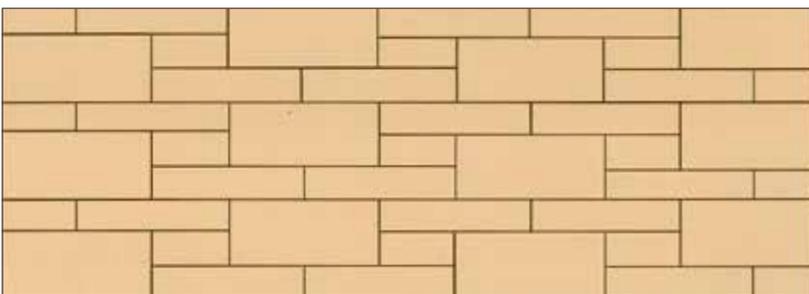

Cottage

Blocks required per square metre

9.56	@	150 x 65mm
19.12	@	300 x 65mm
9.56	@	300 x 140mm

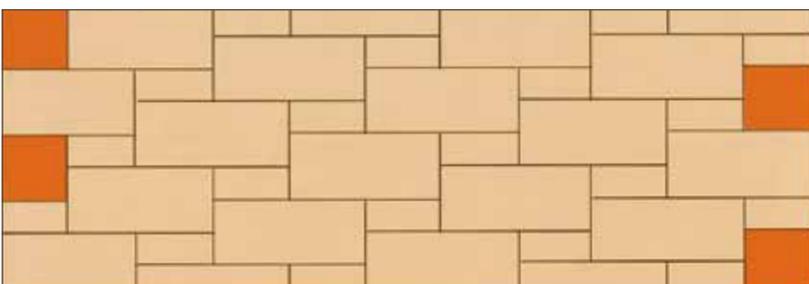

Dutch

Blocks required per square metre

17.20	@	150 x 65mm
17.20	@	300 x 140mm



Quoin block or use
300 x 140mm to continue pattern

GUIDE TO WALLING CONSTRUCTION

Important Information






For a retaining wall higher than 0.6 metres or any other wall above 0.9 metres it is recommended that professional advice should be sought on its construction and whether planning permission is required. As a guide the depth should be 1/3 of the walls height and the foundation width should be at least 3 times as wide as the wall.

Preparation

Dig a foundation trench of the required width and depth, ensure the ground is firm and if in doubt seek professional advice. Lay a level concrete footing using 4 parts aggregate, 2 parts sand to 1 part cement (1:2:4) or contact Glendinning for a delivery of Readymix concrete.

Laying

Mix up a mortar of 1:3 cement to building sand. With a trowel, spread mortar on the foundations where the wall is to go. Lay the corners and ends up to 3 or 4 courses. Then stretch a string-line between the two ends, and build up one course at a time. For accuracy, check with a spirit level vertically, horizontally and diagonally. When you've laid one course, spread mortar along the top ready for the next course. Spread enough mortar so that when a block is in the correct position, a little squeezes out all along the joint. Walls up to 450mm high can be built without piers but over this height piers are needed every 3 metres.

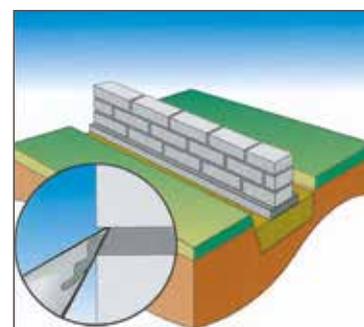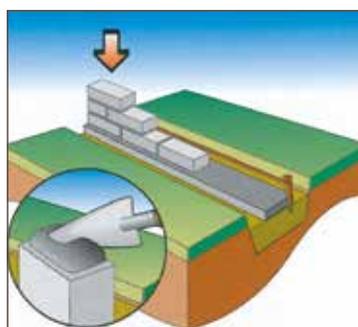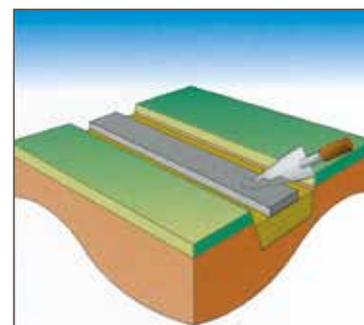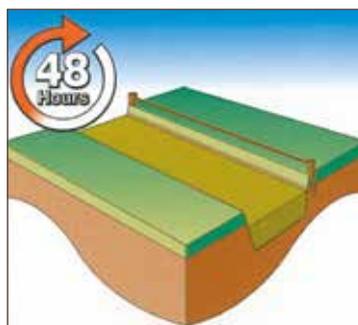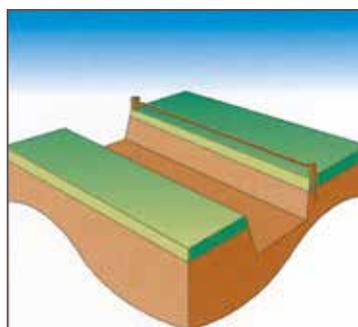



Instructions are a guide only

Remember to put mortar on the end of each block before you lay it. This fills the end joint. Cut any surplus mortar off with the trowel. Using a pointing trowel, smooth and finish the mortar joints. Build 6 to 8 courses – then stop to allow the mortar to set before you start to build again. When the wall is complete, finish with a coping.

CILLS, COPING AND PIER CAPS



Sunk, weathered, throated and grooved, throat 12mm wide and 12mm from front edge

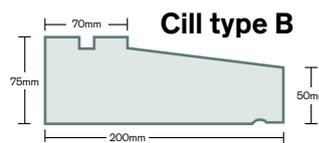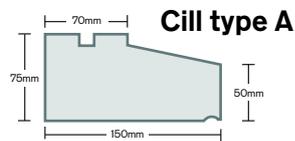


Available in increments of 300mm from 600mm up to 2400mm. Cills can be cut to length as long as exposed steel is painted with an approved metal primer.



Double throated, throat 12mm wide and 12mm in from the edge

Coping Sizes 914mm long *600mm long

Single Weathered	Depth	Double Weathered	Depth
178mm	63/38mm	-	-
178mm	-	178mm	70/45mm
229mm	75/50mm	229mm	75/50mm
305mm*	75/50mm	305mm	75/50mm
356mm	75/50mm	356mm	75/50mm
406mm	75/50mm	406mm	75/50mm
450mm	75/50mm	450mm	75/50mm
500mm	75/50mm		

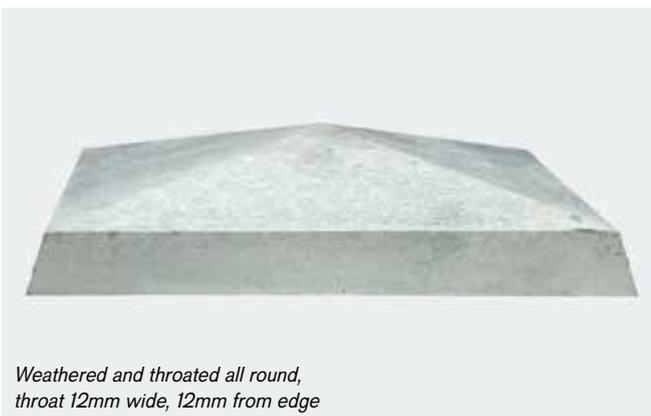

Weathered and throated all round, throat 12mm wide, 12mm from edge

Pier Cap Sizes

Overall Dimensions	Depth
305mm	75/50mm
406mm	100/50mm
450mm	100/50mm
533mm	127/70mm

GENERAL PRODUCTS

Steps and Risers

Available in plain concrete. 900 x 375 x 150 x 50 overall.
1200 x 375 x 150 x 50 overall.

Step Treads

Available in plain concrete. 900 x 375 x 50 overall.
1200 x 375 x 50 overall.

Gully Surround

240 x 195mm (internally). Pack Qty: 42.

Bollards

Bollards are available in plain concrete.

Slither Tile



Breaks into six slithers, used for packing and raising manholes.
600 x 280 x 25mm.

Bay Blocks

Glendinning bay blocks are designed to be a fully portable dry laid interlocking aggregate bay system.

The system comprises of three basic types of block: straight units, 90° angles and T-pieces or intersection blocks, for use where a dividing wall is required.

The units can be handled by a lorry or slab/block grab and also have cast-in M12 x 65 lifting sockets for handling by forklift truck.

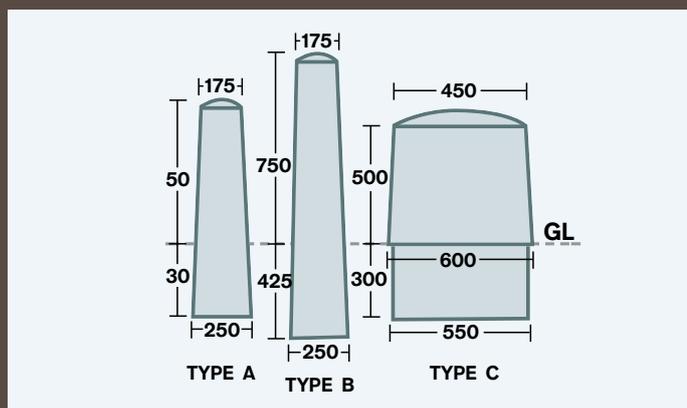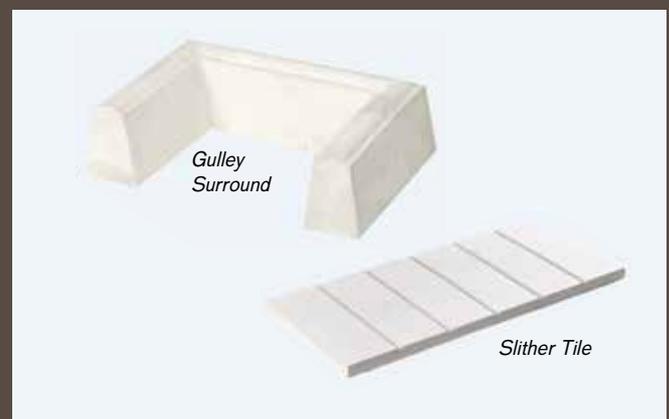

COUNTRY STYLE PRODUCTS

Devontex Textured Paving

This is hydraulically pressed and has been shot blasted to expose the natural stone aggregate to create a high slip resistant surface enhancing its appearance.

SPECIFICATIONS *(Full range of colours & sizes on page 42 some products made to order)*



PARIS STREET, EXETER
SILVER GREY TEXTURED, 400 x 400 x 65



FORE STREET, TIVERTON
CHARCOAL TEXTURED, 450 x 300 x 65

Colours & Sizes Textured to Order

Colour	Size	Pack Qty	Pack Weight	m ² per pack
Buff & Natural	B50 600 x 600 x 50mm	20	0.87	7.20
Natural	D50 900 x 600 x 50mm	20	1.11	10.8
Natural	900 x 300 x 50mm	20	0.55	5.40
Natural	C50 750 x 600 x 50mm	20	1.00	9.00
Natural	A50 600 x 450 x 50mm	20	0.65	5.40
Natural	E50 450 x 450 x 50mm	40	0.92	8.10
Silver Grey	F65 400 x 400 x 65mm	30	0.75	4.80
Plymouth Grey	F65 400 x 400 x 65mm	30	0.75	4.80
Made to order	F65 450 x 300 x 65mm	30	0.75	4.80




Country Style products are produced with 90% locally sourced sustainable granite aggregates



Country Style Kerb
used to construct steps offering greater non-slip than standard kerb



Country Style Kerb
size and radius specifications on page 40-41.

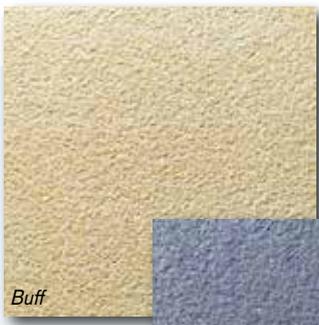

Buff




*Charcoal/
Plymouth Grey*



Natural/Silver Grey

Devontex paving colour options
(some sizes and colours made to order)

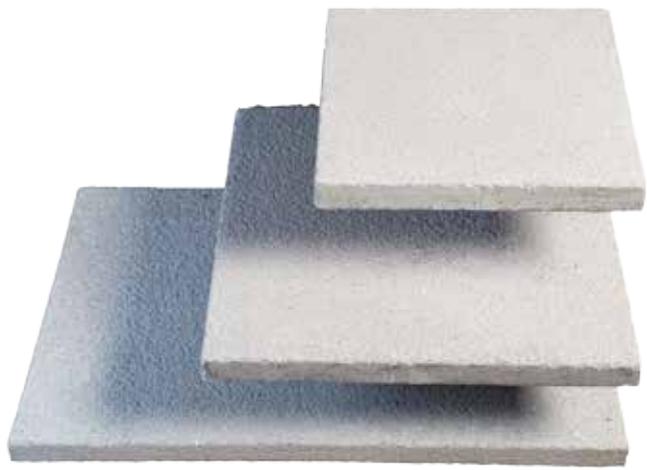

URBAN PAVING



Standard Paving and Flag “Rockhard 50”

The advent of B.E.S.E. paving has complemented rather than replaced the demand for traditional sizes which continue to be the mainstay of the industry. Where there is little danger of heavy traffic causing damage, or where there is a need to match with existing BS 7263 paving, these sizes still have their uses, and hydraulic pressing ensures great strength and durability.

Standard “Rockhard 50” Paving is available in Standard Dimpled Finish.

SPECIFICATIONS



Standard


Colours



Natural



Buff

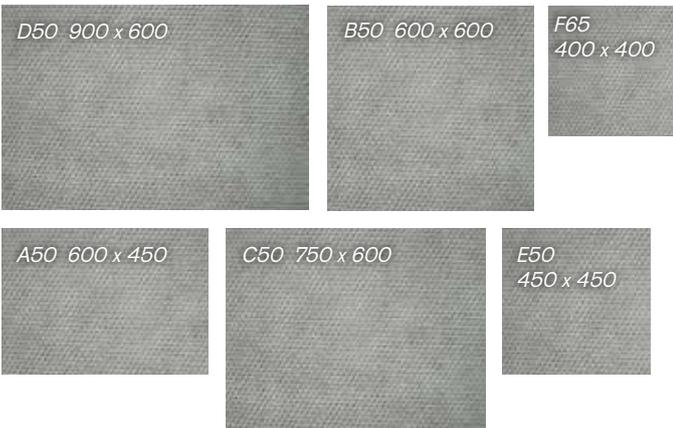

Colours & Sizes

Colour	Size	Pack Qty	Pack Weight	m ² per pack
Natural & Buff	B50 600 x 600 x 50mm	20	0.87	7.20
Natural	D50 900 x 600 x 50mm	20	1.11	10.8
Natural	900 x 300 x 50mm	20	0.55	5.40
Natural	C50 750 x 600 x 50mm	20	1.00	9.00
Natural	A50 600 x 450 x 50mm	20	0.65	5.40
Natural	E50 450 x 450 x 50mm	40	0.92	8.10
Natural	F65 400 x 400 x 65mm	30	0.75	4.80

Manufactured in Plymouth with 90% secondary granite aggregates

Bevel Edged Small Element

This paving has been developed to provide three significant advantages:

- Reduced vulnerability to damage by vehicles mounting footpaths
- Bevelled edges greatly reduce the danger of settlement causing "trips" to develop
- Improved visual appearance offered by the compact sizes
- The texture of the paving has the normal pimple face of hydraulically pressed paving, providing a slip resistant surface also available in an exposed aggregate finish.

Size	Pack Qty	Pack Weight	m ² per pack
F65 400 x 400 x 65mm	30	0.75	4.80
450 x 300 x 65mm	30	0.63	4.05

Not BS size

Tactile Paving

Tactile paving has small domes on the surface which are detected by the feet of blind or partially sighted people to warn of their approach to Pedestrian Crossings. Domes, Buff for uncontrolled crossings; Red for controlled crossings.

Colours & Sizes

Colour	Size	Pack Qty	Pack Weight	m ² per pack
Red & Buff	400 x 400 x 50mm Domed	30	0.63	4.80



KERBS

Edgings BS 7263

Reference	Fig	Profile	Section mm		Section Imp		Length mm L	Pack Qty	Pack Weight		
			H	W	H	W					
BN Motorway		Bull Nose	300	140	12	5	900	10	1.40		
HB2	7	Half Battered	255	125	10	5	914	16	1.07		
HB3	7a	Half Battered	150	125	6	5	914	16	0.64		
BN	2a	Bull Nose	150	125	6	5	914	16	0.64		
DR1	7-2a	HB2 - BN	255 x 125	150 x 125	10 x 5	6 x 5	914	16	1.07		
DL1	7-2a	HB2 - BN	255 x 125	150 x 125	10 x 5	6 x 5	914	16	1.07		
CD		Dish Channel	125	255	10	5	914	16	1.07		
CD		Dish Channel	125	150	6	5	914	16	0.64		
CS 1	8	Flat Channel	125	255	10	5	914	16	1.07		
CS 2	8	Flat Channel	125	150	6	5	914	16	0.64		
QHB		Quadrant (HB2)	305	255	12	10		-	-		
IA		Internal Angle (HB2)	125	255	5	10	12	-	-		
XA		External Angle (HB2)	125	255	5	10	12	-	-		
SQ		Square Section	255	125	10	5	914	16	1.07		
Dropper RH		Square Section	255	125	150	125	10 x 5	6 x 5	914	16	1.07
Dropper LH		Square Section	255	125	150	125	10 x 5	6 x 5	914	16	1.07




Standard



Textured
Country Style

Edgings BS 7263

Reference	Fig	Profile	Section mm		Section Imp		Length mm L	Pack Qty	Pack Weight
			H	W	H	W			
EF >	11	Flat Top	150	50	6	2	914	80	1.23
EF (not BS size)		Flat Top	300	50	12	2	900	20	0.55
EBN	13	Single Bull Nose	150	50	6	2	914	80	1.23
ERT		Round Top	150	50	6	2	914	80	1.23
ERT		Round Top	200	50	8	2	914	60	1.16

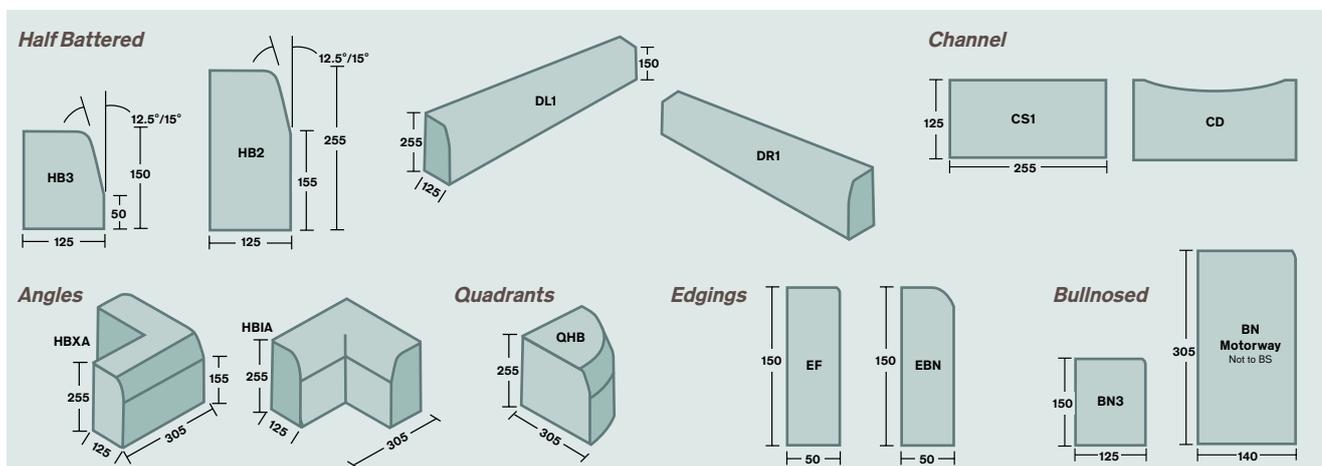


All kerb, channel, radius and EF edgings are available in standard or textured country style finishes.

Country Style and Standard kerb
are produced with 90% locally sourced
sustainable granite aggregates



Radius Formula

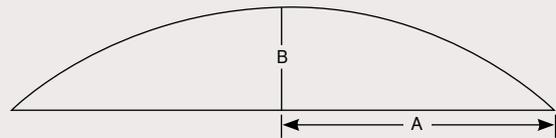

$$\text{Radius} = \frac{A^2 + B^2}{2B}$$

Any radius over 12m use straight kerbs.

Reference	Radius	Section mm	Section Imp	No per	Pack	Pack Weight
	Mtrs	H W L	H W	¼ Circle	Size	Tonne
HB2 External Radius	1	253 x 125 x 780	10 x 5	2	16	1.07
HB2 External Radius	2	253 x 125 x 780	10 x 5	4	16	1.07
HB2 External Radius	3	253 x 125 x 780	10 x 5	6	16	1.07
HB2 External Radius	4	253 x 125 x 780	10 x 5	8	16	1.07
HB2 External Radius	6	253 x 125 x 780	10 x 5	12	16	1.07
HB2 External Radius	8	253 x 125 x 780	10 x 5	16	16	1.07
HB2 External Radius	10	253 x 125 x 780	10 x 5	20	16	1.07
HB2 External Radius	12	253 x 125 x 780	10 x 5	22	16	1.07
HB2 Internal Radius	3	253 x 125 x 780	10 x 5	6	16	1.07
HB2 Internal Radius	6	253 x 125 x 780	10 x 5	12	16	1.07
HB2 Internal Radius	10	253 x 125 x 780	10 x 5	20	16	1.07
BN3 External Radius	3	148 x 125 x 780	6 x 5	6	16	0.64
BN3 External Radius	6	148 x 125 x 780	6 x 5	12	16	0.64
BN3 External Radius	10	148 x 125 x 780	6 x 5	20	16	0.64
BN3 External Radius	12	148 x 125 x 780	6 x 5	22	16	0.64
BN3 Internal Radius	3	148 x 125 x 780	6 x 5	6	16	0.64
BN3 Internal Radius	6	148 x 125 x 780	6 x 5	12	16	0.64
BN3 Internal Radius	10	148 x 125 x 780	6 x 5	20	16	0.64
SQ Internal & External Radius	3	253 x 125 x 870	10 x 5	6	16	1.07
SQ Internal & External Radius	6	253 x 125 x 870	10 x 5	11	16	1.07
SQ Internal & External Radius	9	253 x 125 x 870	10 x 5	17	16	1.07

Please note that Radius and Straight Kerb are made in different production units using different methods and aggregates. To ensure that the texture and finish of our Country Style Radius Kerb match our Country Style Straight Kerb and Dropper units, a minimum of 4 weeks' notice is required for radius units if a match is required. This is to ensure Radius Kerb products can be made with the same aggregates.

Key

- = Made to order - please enquire (Standard or Textured Finishes)
 - ★ = Stock item Dimpled surface (Devonscape - Rockhard - BESE)
 - = Stock item Textured surface (Devontex and other Textured ranges)
 - = Stocked Profile
- Local reclaimed granite aggregates are used in some of our products

Devontex paving colour options (some sizes and colours made to order)



Pressed and Textured Paving Sizes, Profiles and Colours

% GRANITE (correct at time of print)					90		90		90		
					Dimpled 	Dimpled 	Dimpled 				
					Textured 	Textured 	Textured 				
Size mm/Colour			Profile		Silver Grey	Natural Grey	Buff				
L	W	D	Square	Bevel Edge							
450	x	450	x	35	●				★	■	
600	x	600	x	35	●				★	■	
F50	400	x	400	x	50	○	○	○			
E50	450	x	300	x	50	○	○	○			
	450	x	450	x	50	●					
	600	x	300	x	50	○	○	○			
A50	600	x	450	x	50	●	★	■			
B50	600	x	600	x	50	●	★	■		★	■
C50	750	x	600	x	50	●	★	■		○	
	900	x	300	x	50	●	★	■		○	
D50	900	x	600	x	50	●	★	■		○	
G65	300	x	300	x	65		○	○		○	
F65	400	x	400	x	65	○	●	●	★	■	
	450	x	300	x	65	○	●	●	★	■	
E65	450	x	450	x	65	○			○	○	
	600	x	300	x	65	●			★	■	
A65	600	x	450	x	65	○			○	○	
B65	600	x	600	x	65	○			○	○	
	900	x	300	x	65				○	○	
D65	900	x	600	x	65	○			○	○	

% GRANITE (correct at time of print)					90		90		90		
					Dimpled 	Dimpled 	Dimpled 				
					Textured 	Textured 	Textured 				
Size mm/Colour			Profile		Charcoal	Pink	Plymouth Grey				
L	W	D	Square	Bevel Edge							
450	x	450	x	35	●				○		
600	x	600	x	35	●				○		
F50	400	x	400	x	50	○	○	○			
E50	450	x	300	x	50	○	○	○			
	450	x	450	x	50	○					
	600	x	300	x	50	○	○	○			
A50	600	x	450	x	50	●					
B50	600	x	600	x	50	●					
C50	750	x	600	x	50	●					
	900	x	300	x	50	●					
D50	900	x	600	x	50	●					
G65	300	x	300	x	65		○	○			
F65	400	x	400	x	65	○	●	●		★	■
	450	x	300	x	65	○	●	●		○	
E65	450	x	450	x	65	○			○	○	
	600	x	300	x	65	●			★	■	
A65	600	x	450	x	65	○			○	○	
B65	600	x	600	x	65	○			○	○	
	900	x	300	x	65				○	○	
D65	900	x	600	x	65	○			○	○	

CONCRETE FENCE POSTS




Intermediate Fence Posts


tapered from bottom to top and used in a straight run, spaced at a maximum of 3m intervals.

End Strainers

square posts used at each end of a fencing run.



Intermediate Strainers




either 100mm or 125mm square posts, according to height, used at regular intervals to allow for tensioning of line wire.

Universal Strainers

either 100mm or 125mm square posts, according to height, holed to enable their use as intermediate, corner or three-way strainer posts.

Struts

used as supports for all strainer posts, one strut is required for End Strainers, two for Intermediate and Corner Strainers and three for Three-Way Strainers.




Cranked Arm Security Posts



2.63m post with a 450mm cranked arm at a 45° angle. Designed to be used with 1800mm chainlink with three strands of barbed wire attached to the cranked arm.

NB: When ordering cranked arm strainers it must be stated whether the crank faces inwards or outwards.

Slotted Posts

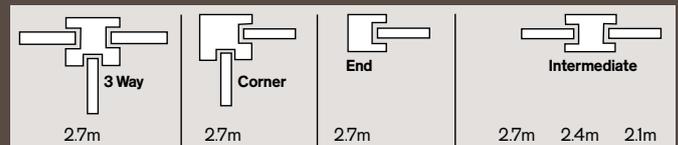

2.7m, 2.4m, 2.1m x 115mm x 90mm


For use with Gravel Boards and/or Wooden Fence panels.

Gravel Boards

1.83m x 300mm x 50mm finished in plain concrete, for use with Slotted Posts.

Spur Posts

1.2m x 100mm square post designed for supporting a wooden fence post.



Strained Wire Fences

Height of Fence to Top Wire	Intermediate Tapered Post	Strainer Posts	Struts	Height of Posts Out of Ground	No. of Line Wires
0.85m	1.50m	1.50m x 100 x 100mm	1.70mm x 80 x 75mm	0.925m	4
1.00m	1.67m	1.67m x 125 x 125mm	1.70mm x 80 x 75mm	1.075m	5
1.40m	2.07m	2.07m x 125 x 125mm	2.07m x 100 x 75mm	1.475m	7

Chain Link Fences

Height of Fence to Top Wire	Intermediate Tapered Post	Strainer Posts	Struts	Height of Posts Out of Ground	No. of Line Wires
0.90m	1.50m	1.50m x 100 x 100mm	1.70mm x 80 x 75mm	0.975m	2
1.20m	1.87m	1.87m x 125 x 125mm	*1.87m x 100 x 75mm	1.25m	3
1.40m	2.07m	2.07m x 125 x 125mm	2.07m x 100 x 75mm	1.475m	3
1.80m	2.63m	2.63m x 125 x 125mm	2.63m x 100 x 85mm	1.875m	3

* If using a centre wire, use fencing brackets to enable the wire to pass around the support strut.

TABLE TENNIS TABLE



CHARCOAL

The Glendinning concrete table tennis tables are manufactured at our concrete precast works in Plymouth, Devon. The table is made up of three concrete components and galvanised steel net. The total weight of the table is 1.75 tonnes, making it one of the most stable and durable on the market. We offer a delivery and installation service, subject to access.

The Glendinning concrete table tennis table was devised in consultation with a local community college, with whom we have a long standing relationship. The college was considering installing concrete table tennis tables that had to be imported into the UK. Since the installation of these initial tables, over a hundred concrete table tennis tables have been installed at locations from Cornwall, into London, and Newcastle. Our concrete table tennis tables are endorsed by the English Table Tennis Association (ETTA).



TERRACOTTA

Three colours are available with the size of the table being 2.74 x 1.52 x 0.76m.

Colours



Birchwood Terracotta Charcoal



Our concrete table tennis tables are endorsed by the English Table Tennis Association (ETTA)

CONCRETE BLOCKS

Padstones

440 x 215 x 100mm

440 x 215 x 140mm

Standard or exposed finish available.



Technical Data Sheet for Concrete Masonry Units to EN 771-3

Unit Type All Category II Strength / Size	Unit Description	Dimensions (mm) Tolerance Category D1 +3, -5 +3, -5 +3, -5 Length/Width/Height	Configuration All Group 1 i.e.< 25% Formed Voids	Density Gross (dry) Tolerance ± 10% kg/m ³	Unit Mass (Approx unconditioned) kg	Thermal Conductivity [W/(mK)] EN 1745 P=50% (λ _{10, d7}) (- from laboratory test)	Moisture Movement (total movement) mm/m	No. per Pack
3.6 N/mm ² 100mm	Standard Common	440 97 215	Solid	1950	18.600	1.00	0.53	72
7.3 N/mm ² 100mm	Standard Common	440 97 215	Solid	1900	18.600	1.00	0.53	72
10.4 N/mm ² 100mm	Standard Common	440 97 215	Solid	2000	19.300	1.00	0.53	72
7.3 N/mm ² 100mm Close Textured / Close Textured	Close Textured / Paint Grade Common	440 97 215	Solid	1950	18.900	1.00	0.53	72
3.6 N/mm ² 140mm	Standard Common	440 140 215	Solid	1900	27.700*	1.00	0.53	48
7.3 N/mm ² 140mm	Standard Common	440 140 215	Solid	1900	27.700*	1.00	0.53	48
10.4 N/mm ² 140mm	Standard Common	440 140 215	Solid	2000	28.300*	1.00	0.53	48
7.3 N/mm ² 140mm Close Textured / Close Textured	Close Textured / Paint Grade Common	440 140 215	Solid	1950	28.000*	1.00	0.53	48
7.3 N/mm ² 100mm Light weight Agg'	Standard Common	440 97 215	Solid	1450	14.000	0.45	0.45	90
7.3 N/mm ² 140mm Light weight Agg'	Standard Common	440 140 215	Solid	1450	19.500	0.45	0.45	60
7.3 N/mm ² Blockette	Standard Common	215 100 65	Solid	2000	2.700	1.00	0.53	384
7.3 N/mm ² Blockette Light weight Agg'	Standard Common	215 100 65	Solid	1450	1.960	0.45	0.53	384
7.3 N/mm ² Coursing Block	Standard Common	440 97 140	Solid	1900	11.700	1.00	0.53	66

* Warning: Single units weigh more than 20kg and require manual handling risk assessment prior to use.

PRODUCT INFORMATION

All sizes are nominal

Application and Suitability

The products contained in this brochure are intended for use in landscape projects and we cannot accept any liability where the products have been used for inappropriate purposes. For technical advice contact our sales office. In the unlikely event of products reaching you in a less than satisfactory condition please refer to your vendor immediately. We cannot accept any liability for any defect once the product has been laid if on investigation it is found that the defect was apparent prior to use.

Characteristics of Concrete Paving Products

Our decorative concrete paving products are designed to be used in domestic situations and subsequently are often in the open and subject to weathering and general wear and tear from use. Concrete is made with naturally occurring aggregates which can, not only, vary in colour but will also react with its environment. These reactions will not have a detrimental effect on the long term performance of the paving but the following are some particular issues to be aware of:

Efflorescence

Efflorescence can appear on all concrete paving and precast products, as a white/grey deposit or an apparent lightening of the surface (efflorescence bloom) both of which seem to disappear when wet only to reappear as the surface dries. In general, the UK weather conditions promote its creation over the winter and spring and then it becomes more apparent as these areas come back into frequent use.

It is formed by a chemical reaction between water and naturally occurring salts within the makeup of cement which is used in the creation of concrete products and mortar which they are often bedded on. This reaction creates calcium hydroxide on the surface which combines with carbon dioxide in the atmosphere to form calcium carbonate crystals.

Although there are cleaners available on the market the best advice is to allow the salts to "exhaust" and allow efflorescence to weather naturally.

Colour variations and Dark Patches

Colours can appear different subject to the weather conditions, especially in weathered shades. The extent of variation can depend on the prevailing weather conditions such as sunlight, shade or rain.

Colour variation from natural constituents can be minimised by ensuring slabs are selected from the same batch, this is especially important when considering additional orders or extensions to patios.

On occasions dark patches or discolouration may appear on the surface. Differential curing or differential weathering as it's sometimes referred can create these patches which can be enhanced by the presence of efflorescence. This is caused by the surface of the paving curing at different rate and although this will generally diminish it will not affect the long-term use of the products.

It must be noted that these effects are outside of our manufacturing control and E & JW Glendinning Ltd cannot take responsibility for their occurrence. Although their presence will not affect the long-term performance of the product. If total blemish free appearance over time is required, alternative materials should be considered.

Dusting

In pigmented products with high pigment content some colour transfer may be apparent, should this be an inconvenience then a proprietary dust proofer may be considered.

Sizes

All sizes stated are nominal and within manufacturing tolerances. It must be noted that riven products especially, due to their very nature, will have greater variations in thickness.

Maintenance Guidelines

General Cleaning: Aggressive cleaning methods such as pressure washers are not recommended for use on decorative concrete products. We cannot take responsibility for any damage caused by such action. Scrub the area, either by hand or using industrial cleaner with a detergent solution and wash-off with copious quantities of water.

Moss and lichen: Use proprietary chemicals especially designed for this application.

Oil Stains: Do not wipe over, absorb any spillages with absorbent towels, cloths or granules. Use proprietary chemicals especially designed for this application.

Beverage stains: Scrub with soapy water, rinse well. If there is persistent staining use proprietary chemicals especially designed for this application.

De-icing Salts: Can have a destructive effect on all concrete products.

Protection in Transit

Due to limited protection in transit, there is the remote possibility that the product may acquire scratch marks. This is a surface effect and will be unnoticeable in a very short time.

Weights and m² per pack

All weights and m² per pack are approximate. Weights unless stated are in metric tonnes.

Health, Safety & The Environment

Before handling any building product you should always undertake your own risk assessment and take appropriate precautions especially with regard to lifting, cutting, drilling or abrading. If a pallet is supplied with your product please contact the Vendor for its return. Packaging should be recycled wherever possible. Do not burn.

Handling And Storage

E & JW Glendinning Ltd cannot accept any responsibility for damage to product when being moved. Special notice must be taken with regard to the weight of packs, pallets and individual product: please refer to the brochure for details of weights. It may be wise to wear rugged and protective gloves before handling packs and products. Packs should not be stored on surfaces with poor drainage. On hard surfacing designed as a stock yard packs can be stacked up to 4 high. On level hardstanding packs should not be stacked more than 2 high; we would not recommend stacking on any other surface.

Terms and Conditions

Our standard terms and conditions apply and are available from our website. In the unlikely event of the customer being dissatisfied with the product, no claims for replacement or compensation will be considered after the product has been installed. Our liability only extends to free replacement of the products in question.

For technical information please contact the sales office 01364 652601.



Glendinning manufactures in an environmentally responsible manner and we source products and services locally wherever possible. Our commitment to sourcing locally is also reflected in our support for the principle of reducing the distance that minerals and products travel across the UK by encouraging companies and individuals to buy locally, thus reducing carbon consumption.

The UK Government has set a target to decarbonise the UK economy by 80% by 2050. The minerals industry has its own part to play with the transportation of minerals accounting for just over 32% of the industry's CO₂ output.

Glendinning operates its manufacturing plants to a certified Environmental Management System (EMS) that is externally audited to the ISO 14001 accreditation. An EMS is also held by our key supply chain processes, as specified in the Responsible Sourcing Assessment criteria of BREEAM and the Code for Sustainable Homes. This level of responsible sourcing assurance can contribute towards the required BREEAM rating or Code assessment.

As part of our sustainable policy we use a range of local reclaimed granite based aggregates within our product range. Products such as the textured silver grey urban paving are made from 90% reclaimed granite and our kerb and flag contains approximately 90% reclaimed granite.


built on solid principles



Glendinning
QUARRY & CONCRETE PRODUCTS

built on solid principles

Stockist:



CONTACT US

Head Office

Glentor, Ashburton
Newton Abbot
TQ13 7LF

t 01364 652601

f 01364 652978

sales@ejwglendinning.co.uk

LINHAY HILL QUARRY

Linhay Hill Quarry
Ashburton
TQ13 7ES

t 01364 652601

f 01364 651113

PAVING AND WALLING

Embankment Road
Plymouth
PL4 9JH

t 01752 267411

f 01752 220593

CONTRACTING DIVISION

Glenway, Exhibition Way
Pinhoe, Exeter
EX4 8HT

t 01392 465348

f 01392 464822

PIGSDON QUARRY

Launcells
Bude
Cornwall
EX23 9LQ

t 01288 321538

f 01288 308125